

Roll Up Dock Door


INSTALLATION INSTRUCTIONS



AKON - Curtain and Divider

P: 989-414-1209 - F: 888-501-5865

www.curtain-and-divider.com

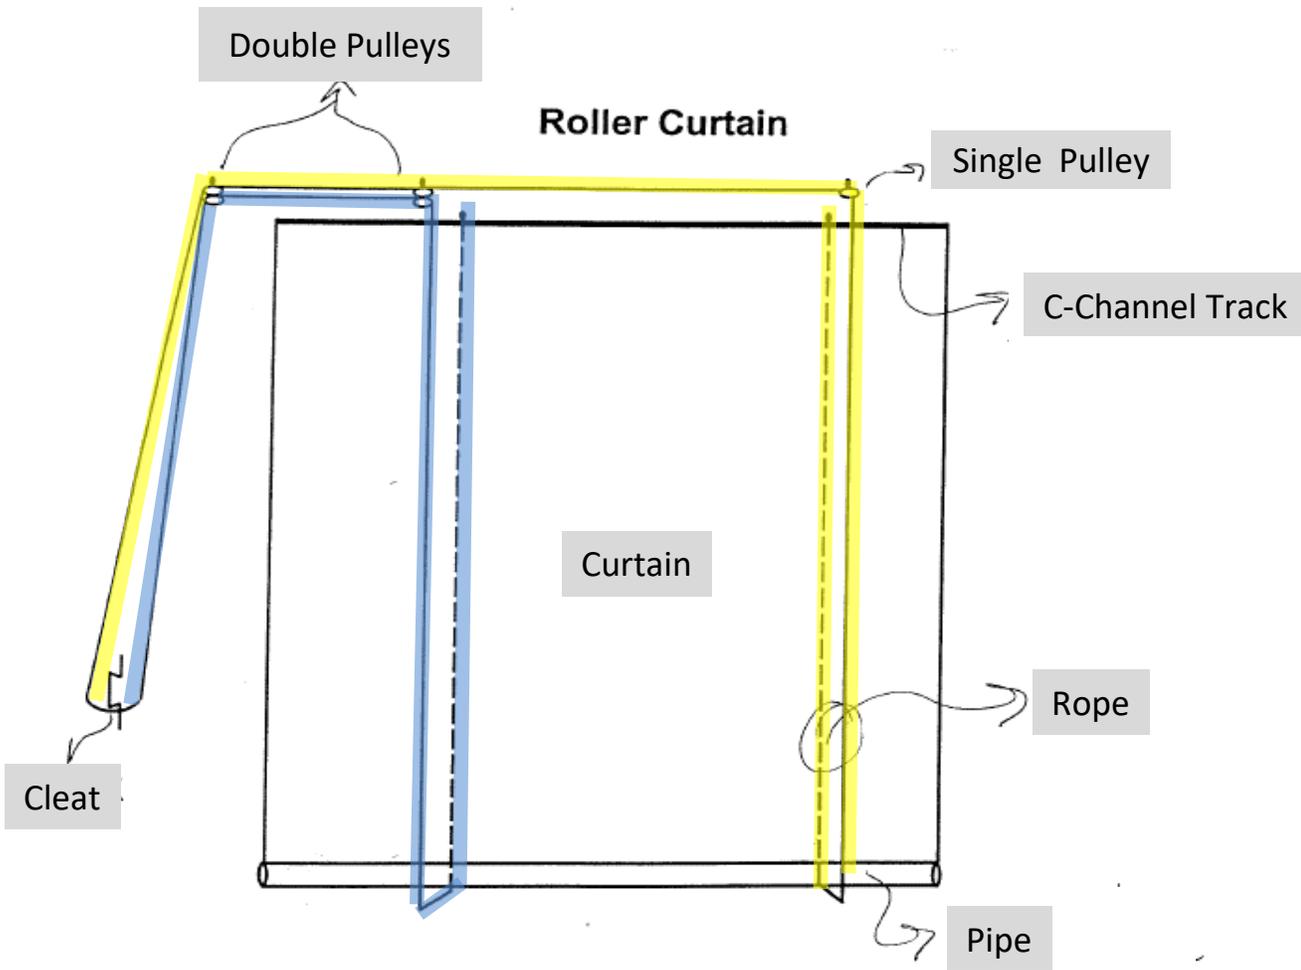

THE COMPONENTS

Cleat - Qty 1



Single Pulley - Qty 1



Double Pulley - Qty 2



Eye Straps - Qty 3



Note that your order will have one or the other of these eye straps but not both.

Curtain - Qty 1



Velcro - Qty 1



Bottom Pipe - Qty 1



Rope - Qty 1



C-Channel Track - Qty 1



Not Included

Fasteners appropriate for your mounting surface.


STEP BY STEP INSTRUCTIONS

1 Install the C-Channel track

*Hold the curtain up against the wall or measure it so you have the track at the ideal height
Make sure it is loose enough so you can get rope behind it later in the installation.*

2 Install the Eyestraps With The Pulleys

*Install eyestraps with pulleys 1/4 of the distance in from each end of the track about 1 inch above the track.
The single pulley will be furthest from the location of the cleat. Install final eye strap and pulley the same distance from the floor as first two and immediately about the location where you will place the cleat*

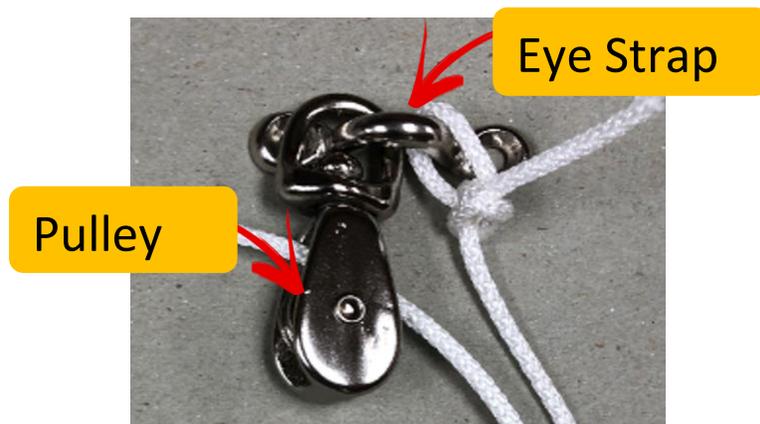


3

Install The Rope

First Rope YELLOW - Push one end of rope up behind track and tie to eyestay holding the single pulley. Take rope the distance to touch floor and then back up to single pulley, then over the double pulley, and then to second double pulley and then down to future cleat location plus add about two feet of extra rope. Cut the rope. Tie stopper knot in end of rope.

Second Rope BLUE - Take remaining rope. Push one end of rope up behind track and tie to eyestay holding the double pulley. Take rope the distance to touch floor and then back up to double pulley and then to second double pulley and then down to future cleat location. Tie stopper knot in end of rope.

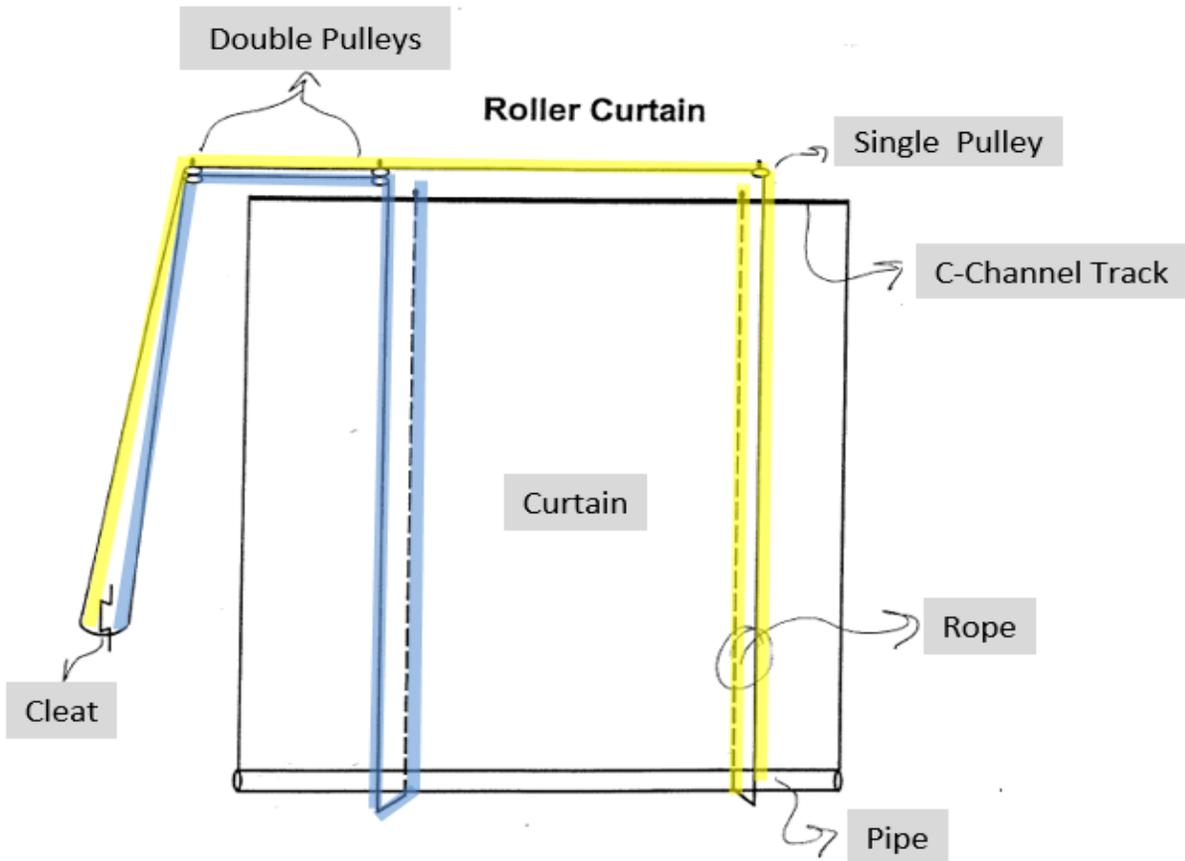

4

Tighten the track mounting.

Tighten customer supplied fasteners holding the track to the mounting surface.

5

Unfold the curtain

Unroll and unfold the curtain completely. Top of the curtain has a hard plastic "track line" sewn into the hem. Roll up the curtain (like a cigar) so the entire track line is at the top of your roll and exposed.

6

Install the Curtain Into The C-Channel Track

Using a ladder (or two) feed the track line into the track. Use a pair of pliers to slightly lift top edge of the channel to make feeding curtain into track easier. The curtain (still rolled up) should slide into the track and in between the rope loops going to the floor. The end of the rope that is tied behind the track should be to the rear of the curtain and the portion of the loop that goes up to the pulley should be to the front of the

7 **Unroll the Curtain**

Once the entire track line is in the track, unroll the curtain towards the floor.

8 **Install the Pipe**

Place entire pipe into pipe pocket at the bottom of the curtain.

Note - Most customer choose to use a small washer and bolt to lock the pipe in place.

9 **Tighten the Ropes**

Remove slack from the ropes to be snug at the bottom of the pipe

10 **Install the Cleat**

First - Mark the wall for cleat installation at a comfortable height (about 5' from the floor)

Second - Install cleat onto wall.

11 **Trim the Rope**

Make sure curtain is all the way rolled down. Put a little tension/pressure on center of bottom pipe.

Tighten ropes together without raising the curtain.

First - Trim ropes to be about twelve inches longer than cleat, tie ropes together in a stopper knot about six inches below the cleat.

Second - Gently pull down on curtain from center to make taught



12 **Install Side Wall Velcro**

Note - Wall must be perfectly clean and dry before attaching Velcro

First - Lift and swing curtain out from the bottom and remove paper from back side of self adhesive Velcro

Second - Stick the Velcro to the wall where the curtains sewn on Velcro will line up with it

Third - With light pressure, lower and swing curtain back into place and allow Velcro adhesive to attach to the wall

Fourth - Press down along the curtain hems to ensure adhesive has contact to wall.

Note - Most customer choose to use a small washer and bolt to pinch the Velcro to the wall

Let sit for 2 hours

13 **Roll up curtain and then begin normal operation.**

AKON - Curtain and Divider

P: 989-414-1209 - F: 888-501-5865

www.curtain-and-divider.com